75 cm, FRIDGE AND FREEZER, 0T Model BUILT-IN

INTEGRATED® SERIE







FEATURES

- Made in Italy.
- Aisi 304 stainless steel body.
- Stainless steel interior finish
- Antibacterial stainless steel interior.
- Evenlift: shelves can slide up and down to be adjusted to any height in the fridge compartment.
- Provent ventilation system encourages uniform distribution of cold air in all fridge compartments by laterally circulation air.
- Equilance: dual movement patented hinge with self balancing movement ensures stability and resistance.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart touch TFT display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Variable speed compressors mainteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- Two indipendent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Crisper drawers for multi use preservazion solution.
 Antibacterial stainless steel interior & rounded courners promoting hygiene and easy cleaning.
- Deep capacity within a standard depth is achieved by a side mounted evaporators, wich leaves grater interior space.
- Full range of models and configurations (45, 60, 75 and 90 cm). Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.


GENERAL PROPERTIES		
Reversible door	NO NO	
Equilance	YES	
SoftClosing Runner	YES	
Low vibration	YES	
Optieview (LED light spots)	YES	
Shelves	3	
Slide-out shelves	NO NO	
Type of shelves	Glass	
Door Bins	3	
Fridge drawers type	LOW TEMP	
Fresco/LowTemp Drawers	2	
Bottom drawers	1	
Full Extension shelves 90° door opening	YES	
Full Extension drawers 90° door opening	YES	
Defrost Process	AUTOMATIC	
Ice maker with water filter	YES	
Door Open Alarms	YES	
Humidity control	NO NO	
Active carbon filter	NO NO	
Air filter control	NO NO	
Shopping Fridge	YES	
Shopping Freezer	YES	
Power Failure Function	YES	


75 cm, FRIDGE AND FREEZER, 0T Model

BUILT-IN

INTEGRATED® SERIE

PRODUCT DETAIL







D = door

BD = drawer

M = separate microclimates

Filaba

CAPACITY	
Volume Compartment 1 (L)	335
Volume Compartment 2 (L)	
Volume Compartment 3 (L)	105
Total Net Volume (L)	440
Total Gross Volume (L)	461
Compartment 1 / Upper wine cellar capacity (bottles)	
Compartment 2 / Lower wine cellar capacity (bottles)	
Compartment 3 / Bottom wine cellar capacity (bottles)	_

TECHNICAL DETAILS		
Absorbed power (W)		
Total absorbed current (A)	1.4	
Voltage (V)	220-240V	
Frequency (Hz)	50-60 Hz	
Power Cord Length (mm)	2	
Plug Type	Schuko 16A	
Climatic class	SN/T	
Noise level (dB)	41	
Refrigerant (gas)	R600a	
Water connection / female attachment	female 3/4"	

EFFICIENCY		
New Energy Label class	F	
Energy consumption (kWh/year)	323	
DIMENSIONS & WEIGHT		
Height of the product (closed weels) (mm)	2050	
Adjustable feet height (mm)	25	
Width of the product (mm)	749	
Depth of Product without handle (mm)	610 2064 750	
Wall cavity height (mm)		
Wall cavity width (mm)		
Wall cavity depth (mm)	650	
Net Weight (kg)	169	
Gross Weight (kg)	190	
TEMPERATURE RANGES		
Climatic compartments	2	
Compartment 1 / Upper temperature (°C)	from 2 to 8	
Compartment 2 / Middle temperature (°C)		
Low temp zone	YES	
Compartment 3 / Low temperature (°C)	from -15 to -22	
Dual zone	NO NO	


75 cm, FRIDGE AND FREEZER, 0T Model

BUILT-IN


INTEGRATED® SERIE

PRODUCT SPECIFICATIONS AND DIMENSIONS


FRONT VIEW SIDE VIEW

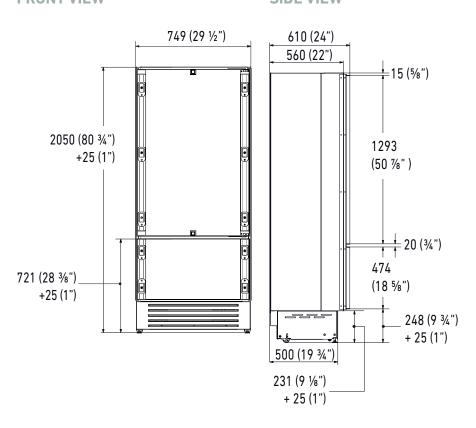


TOP VIEW, HINGE 105°



TOP VIEW, HINGE 90°



PLINTH SIZE



FARIA



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.




Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

75 cm, FRIDGE AND FREEZER, 0T Model BUILT-IN

INTEGRATED® SERIE


NICHE SPECIFICATIONS AND DIMENSIONS



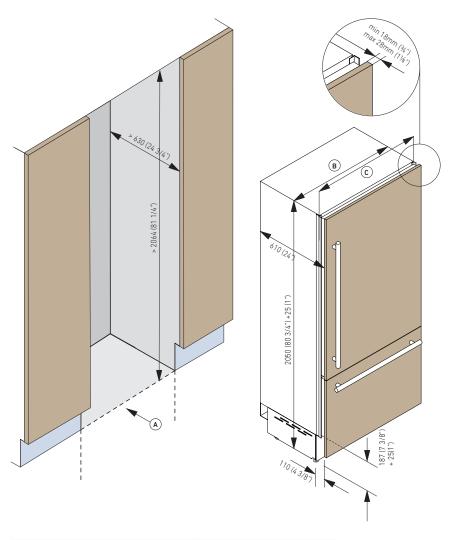

TECHNICAL DATA	
Niche Width A (mm)	750
Unit Width B (mm)	737
Unit Width with lateral frames C (mm)	749


Electrical and Water connection

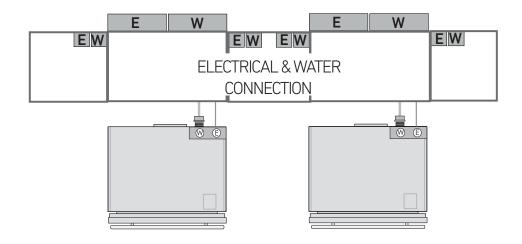

75 cm, FRIDGE AND FREEZER, 0T Model BUILT-IN

INTEGRATED® SERIE

CUSTOM PANELS INFORMATION

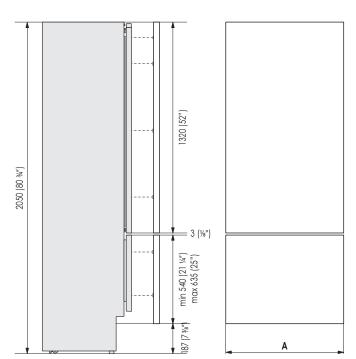

Serie	Α	
749 (75 cm)	747 (29 3/8")	

A

Integrated Panel Recommendations

Panels with thickness ranging between 18 mm and 28 mm. Door panels with weight max of 23 kg and drawer panels with weight max of 11 kg. Provide installation of decorative panels during installation of the unit.



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.



75 cm, FRIDGE AND FREEZER, 0T Model


BUILT-IN

INTEGRATED® SERIE

INSTALLATION INFORMATION



Niche dimensions for combined installation



			Α		
	unit size	45	60	75	90
	45	90 cm	105 cm	120 cm	135 cm
В	60	105 cm	120 cm	135 cm	150 cm
	75	120 cm	135 cm	150 cm	165 cm
	90	135 cm	150 cm	165 cm	180 cm

ACCESSORIES

- Stainless steel sides panels
- Ice maker with water filter
- Water filtration system
- Joining kit
- Stainless steel tubolar handless 30mm
- Stainless steel tubolar handless 18mm
- Stainless steel panels
- Stainless steel portal for freestanding
- Extra lenght anti-tipping kit
- Anticondensation kit
- Cleaning kit
- Water filter cartridge
- FLD Fhiaba Link Device

- Front ventilation kit
- 90° Door stop
- Push / pull opening



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

