90 cm, FRIDGE, 0FR Model BUILT-IN

INTEGRATED® SERIE







FEATURES


- Made in Italy.
- Aisi 304 stainless steel body.
- Stainless steel interior finish
- Antibacterial stainless steel interior.
- Evenlift: shelves can slide up and down to be adjusted to any height in the fridge compartment.
- Provent ventilation system encourages uniform distribution of cold air in all fridge compartments by laterally circulation air.
- Equilance: dual movement patented hinge with self balancing movement ensures stability and resistance.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart touch TFT display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Variable speed compressors mainteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- One indipendent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Crisper drawers for multi use preservazion solution.
 Antibacterial stainless steel interior & rounded courners promoting hygiene and easy cleaning.
- Deep capacity within a standard depth is achieved by a side mounted evaporators, wich leaves grater interior space.
- Full range of models and configurations (45, 60, 75 and 90 cm). Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.


GENERAL PROPERTIES	
Reversible door	NO
Equilance	YES
SoftClosing Runner	YES
Low vibration	YES
Optieview (LED light spots)	YES
Shelves	3
Slide-out shelves	NO
Type of shelves	glass
Door Bins	3
Fridge drawers type	LOW TEMP
Fresco/LowTemp Drawers	3
Bottom drawers	
Full Extension shelves 90° door opening	YES
Full Extension drawers 90° door opening	YES
Defrost Process	AUTOMATIC
Ice maker with water filter	NO NO
Door Open Alarms	YES
Humidity control	NO
Active carbon filter	NO NO
Air filter control	NO
Shopping Fridge	YES
Shopping Freezer	NO NO

90 cm, FRIDGE, 0FR Model BUILT-IN

INTEGRATED® SERIE

PRODUCT DETAIL







1D	1M
fridge	

 $\mathbf{D} = \mathsf{door}$

 \mathbf{M} = separate microclimates

CAPACITY	
Volume Compartment 1 (L)	619
Volume Compartment 2 (L)	
Volume Compartment 3 (L)	
Total Net Volume (L)	619
Total Gross Volume (L)	629
Compartment 1 / Upper wine cellar capacity (bottles)	
Compartment 2 / Lower wine cellar capacity (bottles)	
Compartment 3 / Bottom wine cellar capacity (bottles)	

TECHNICAL DETAILS		
Absorbed power (W)		
Total absorbed current (A)	2	
Voltage (V)	220-240V	
Frequency (Hz)	50-60 Hz	
Power Cord Length (mm)	2	
Plug Type	Schuko 16A	
Climatic class	SN/T	
Noise level (dB)	41	
Refrigerant (gas)	R600a	
Water connection / female attachment	-	

EFFICIENCY	
New Energy Label class	F
Energy consumption (kWh/year)	188
DIMENSIONS & WEIGHT	
Height of the product (closed weels) (mm)	2050
Adjustable feet height (mm)	25
Width of the product (mm)	899
Depth of Product without handle (mm)	615
Wall cavity height (mm)	2064
Wall cavity width (mm)	900
Wall cavity depth (mm)	650
Net Weight (kg)	168
Gross Weight (kg)	189
TEMPERATURE RANGES	
Climatic compartments	1
Compartment 1 / Upper temperature (°C)	from 2 to 8
Compartment 2 / Middle temperature (°C)	
Low temp zone	YES
Compartment 3 / Low temperature (°C)	
Dual zone	NO
	·

90 cm, FRIDGE, 0FR Model


BUILT-IN


INTEGRATED® SERIE

PRODUCT SPECIFICATIONS AND DIMENSIONS


FRONT VIEW






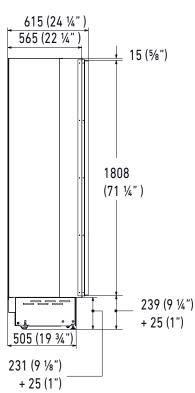


TOP VIEW, HINGE 105°



TOP VIEW, HINGE 90°



PLINTH SIZE



FARIA



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.




Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

90 cm, FRIDGE, 0FR Model BUILT-IN INTEGRATED® SERIE




NICHE SPECIFICATIONS AND DIMENSIONS

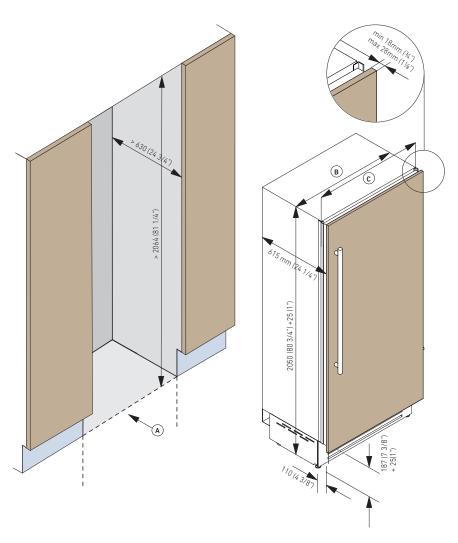

TECHNICAL DATA	
Niche Width A (mm)	900
Unit Width B (mm)	887
Unit Width with lateral frames C (mm)	899


Electrical and Water connection

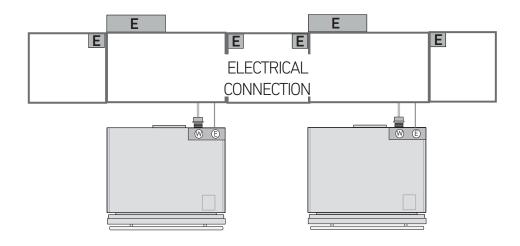

90 cm, FRIDGE, 0FR Model **BUILT-IN**



CUSTOM PANELS INFORMATION

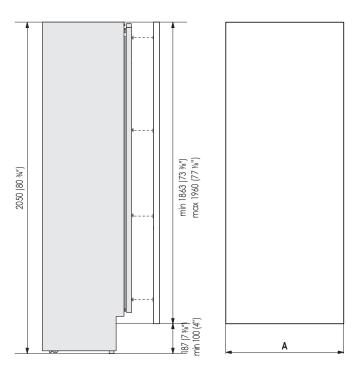

Serie	Α	
899 (90 cm)	897 (35 1/4")	

Integrated Panel Recommendations

Panels with thickness ranging between 18 mm and 28 mm. Door panels with weight max of 34 kg and drawer panels with weight max of kg. Provide installation of decorative panels during installation of the unit.



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

Fhaba


90 cm, FRIDGE, 0FR Model **BUILT-IN**

INTEGRATED® SERIE

INSTALLATION INFORMATION



Niche dimensions for combined installation



			А		
В	unit size	45	60	75	90
	45	90 cm	105 cm	120 cm	135 cm
	60	105 cm	120 cm	135 cm	150 cm
	75	120 cm	135 cm	150 cm	165 cm
	90	135 cm	150 cm	165 cm	180 cm

ACCESSORIES

- Stainless steel sides panels
- Joining kit
- Stainless steel tubolar handless 30mm
- Stainless steel tubolar handless 18mm
- Stainless steel panels
- Stainless steel portal for freestanding
- Extra lenght anti-tipping kit
- Anticondensation kit
- Cleaning kit
- FLD Fhiaba Link Device
- Front ventilation kit
- 90° Door stop
- Push / pull opening



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

