S7490FZ61

75 cm, FREEZER, 0FZ Model BUILT-IN

INTEGRATED® SERIE







FEATURES

- Made in Italy.
- Aisi 304 stainless steel body.
- Stainless steel interior finish
- Antibacterial stainless steel interior.
- Provent ventilation system encourages uniform distribution of cold air in all fridge compartments by laterally circulation air.
- Equilance: dual movemenet patented hinge with self balancing movement ensures stability and resistance.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart touch TFT display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Variable speed compressors mainteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- One indipendent climatic zone.
- \bullet Tempered glass shelves with aluminium profiles.
- Crisper drawers for multi use preservazion solution.
 Antibacterial stainless steel interior & rounded courners promoting hygiene and easy cleaning.
- Deep capacity within a standard depth is achieved by a side mounted evaporators, wich leaves grater interior space.
- Full range of models and configurations (45, 60, 75 and 90 cm). Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.


		AL PROPERTIES		
i .	NO	Reversible door		
3	YES	Equilance		
	NO	SoftClosing Runner		
3	YES	ation		
3	YES	v (LED light spots)		
	2			
	NO	t shelves		
ISS	glass	helves		
	2	Door Bins		
		awers type		
		owTemp Drawers		
	4	Bottom drawers		
	NO	nsion shelves 90° door opening		
3	YES	Full Extension drawers 90° door opening		
TOMATIC	AUTOMA	Process		
S	YES	Ice maker with water filter		
S	YES	n Alarms		
	NO	control		
	NO	irbon filter		
	NO	Air filter control		
	NO	Shopping Fridge		
3	YES	Shopping Freezer		
3	YES	Power Failure Function		
5	YES	iture function		


75 cm, FREEZER, 0FZ Model

BUILT-IN

INTEGRATED® SERIE

PRODUCT DETAIL







freezer

D = door

 \mathbf{M} = separate microclimates

Filaba

CAPACITY	
Volume Compartment 1 (L)	
Volume Compartment 2 (L)	
Volume Compartment 3 (L)	452
Total Net Volume (L)	452
Total Gross Volume (L)	455
Compartment 1 / Upper wine cellar capacity (bottles)	
Compartment 2 / Lower wine cellar capacity (bottles)	
Compartment 3 / Bottom wine cellar capacity (bottles)	-

TECHNICAL DETAILS		
Absorbed power (W)	327	
Total absorbed current (A)	1.5	
Voltage (V)	220-240V	
Frequency (Hz)	50-60 Hz	
Power Cord Length (mm)	2	
Plug Type	Schuko 16A	
Climatic class	SN/T	
Noise level (dB)	41	
Refrigerant (gas)	R600a	
Water connection / female attachment	female 3/4"	
· · · · · · · · · · · · · · · · · · ·		

EFFICIENCY		
New Energy Label class	F	
Energy consumption (kWh/year)	403	
DIMENSIONS & WEIGHT		
Height of the product (closed weels) (mm)	2050	
Adjustable feet height (mm)	25	
Width of the product (mm)	749	
Depth of Product without handle (mm)	615	
Wall cavity height (mm)	2064	
Wall cavity width (mm)	750	
Wall cavity depth (mm)	650	
Net Weight (kg)	154	
Gross Weight (kg)	175	
TEMPERATURE RANGES		
Climatic compartments	1	
Compartment 1 / Upper temperature (°C)	from -15 to -22	
Compartment 2 / Middle temperature (°C)		
Low temp zone	NO	
Compartment 3 / Low temperature (°C)		
Dual zone	NO NO	


75 cm, FREEZER, 0FZ Model

BUILT-IN


INTEGRATED® SERIE

PRODUCT SPECIFICATIONS AND DIMENSIONS


FRONT VIEW




SIDE VIEW

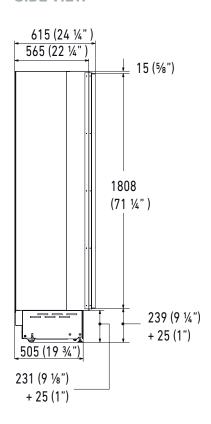


TOP VIEW, HINGE 105°



TOP VIEW, HINGE 90°



PLINTH SIZE



FIRMA



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.




Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

75 cm, FREEZER, 0FZ Model BUILT-IN

INTEGRATED® SERIE


NICHE SPECIFICATIONS AND DIMENSIONS



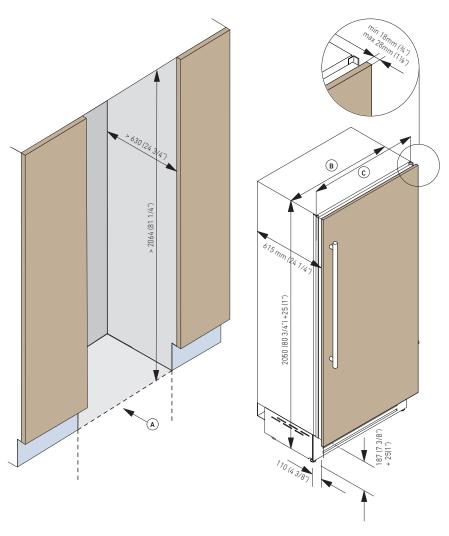

TECHNICAL DATA	
Niche Width A (mm)	750
Unit Width B (mm)	737
Unit Width with lateral frames C (mm)	749


Electrical and Water connection

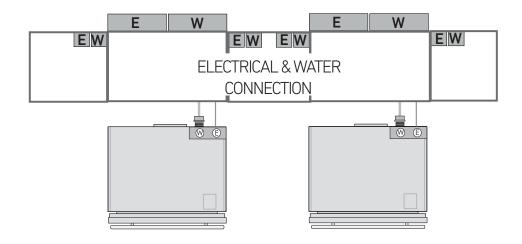

75 cm, FREEZER, 0FZ Model **BUILT-IN**

INTEGRATED® SERIE

CUSTOM PANELS INFORMATION

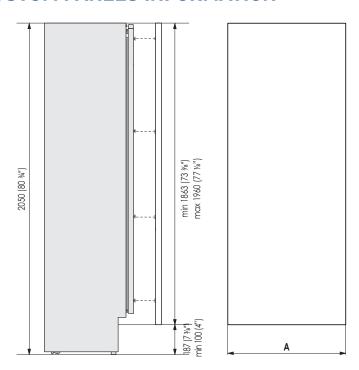

Serie	Α
749 (75 cm)	747 (29 3/8")

Integrated Panel Recommendations

Panels with thickness ranging between 18 mm and 28 mm. Door panels with weight max of 34 kg and drawer panels with weight max of kg. Provide installation of decorative panels during installation of the unit.



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.




Fhaba

75 cm, FREEZER, 0FZ Model **BUILT-IN INTEGRATED® SERIE**

INSTALLATION INFORMATION



Niche dimensions for combined installation



			А		
В	unit size	45	60	75	90
	45	90 cm	105 cm	120 cm	135 cm
	60	105 cm	120 cm	135 cm	150 cm
	75	120 cm	135 cm	150 cm	165 cm
	90	135 cm	150 cm	165 cm	180 cm

ACCESSORIES

- Stainless steel sides panels
- Ice maker with water filter
- Water filtration system
- Joining kit
- Stainless steel tubolar handless 30mm
- Stainless steel tubolar handless 18mm
- Stainless steel panels
- Stainless steel portal for freestanding
- Extra lenght anti-tipping kit
- Anticondensation kit
- Cleaning kit
- Water filter cartridge
- FLD Fhiaba Link Device

- Front ventilation kit
- 90° Door stop



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

